




Telefon: (02 12) 2 47 40 01

Telefax: (02 12) 2 47 40 03

info@gebruch.net

Lamellenstopfen für Rechteckrohre

Gruppe VLR
 Material: PE
 Standardfarben: weiß / schwarz
 Farbcode: 650 / 660
 Sonderfarben auf Anfrage erhältlich

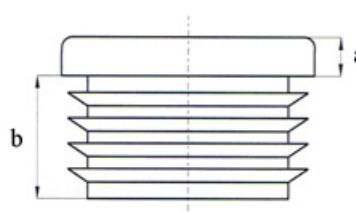

Produktdetails					
Bestell.-Nr.	Rohraußen Ø	Wandstärke	a	b	VE
4002010	20 x 10	0,8 - 2,0	3,0	11,5	100 / 10.000
4002015	20 x 15	1,0 - 2,0	5,0	11,5	100 / 5.000
4002515	25 x 15	0,8 - 2,5	5,0	11,5	100 / 4.000
4002520	25 x 20	1,0 - 3,0	5,0	11,5	100 / 3.000
4003010	30 x 10	0,8 - 2,0	5,0	11,5	100 / 7.000
4003015	30 x 15	0,8 - 2,5	5,0	11,5	100 / 3.500
4003020	30 x 20	1,0 - 3,0	5,0	11,5	100 / 2.500
4003025	30 x 25	0,8 - 3,0	5,0	11,5	100 / 2.000
4003515	35 x 15	1,0 - 3,0	5,0	11,5	100 / 3.000
4003520	35 x 20	0,8 - 3,0	5,0	11,5	100 / 2500
4003525	35 x 25	1,0 - 3,0	5,0	11,5	100 / 1.750
4004010	40 x 10	1,5 - 2,0	5,0	11,5	100 / 3.000
4004015	40 x 15	1,0 - 2,0	5,0	11,5	100 / 2.000
4004020	40 x 20	0,8 - 3,0	5,0	11,5	100 / 2.000
4004025	40 x 25	1,0 - 3,0	5,0	11,5	100 / 1.500
4004030	40 x 30	1,0 - 3,0	5,0	11,5	100 / 1.250
4004520	45 x 20	1,0 - 3,0	5,0	11,5	100 / 1.750
4004525	45 x 25	0,8 - 3,0	5,0	11,5	100 / 1.500
4005020	50 x 20	0,8 - 3,0	5,0	14,5	100 / 1.250
4005025	50 x 25	0,8 - 3,0	5,0	14,5	100 / 1.000
4005030	50 x 30	1,0 - 3,0	5,0	14,5	100 / 800
4005040	50 x 40	0,8 - 3,0	5,0	14,5	100 / 600
4006020	60 x 20	1,0 - 3,0	5,0	14,5	100 / 1.000
4006030	60 x 30	1,0 - 3,0	5,0	14,5	100 / 700
4006040	60 x 40	1,0 - 3,0	5,0	14,5	100 / 500
4006045	60 x 45	1,5 - 4,0	5,0	14,5	100 / 450
4006050	60 x 50	1,5 - 3,5	5,0	14,5	100 / 400



Telefon: (02 12) 2 47 40 01

Telefax: (02 12) 2 47 40 03

info@gebruch.net

Produktdetails					
Bestell.-Nr.	Rohraußen Ø	Wandstärke	a	b	VE
4007020	70 x 20	1,0 - 2,0	5,0	17,0	100 / 1.000
4007030	70 x 30	1,0 - 2,0	5,7	17,0	100 / 1.000
4007040	70 x 40	1,0 - 2,0	5,0	17,0	100 / 500
4047040	70 x 40	3,0 - 4,0	5,0	17,0	100 / 350
4008020	80 x 20	1,0 - 2,0	6,0	17,5	100 / 1.000
4008030	80 x 30	1,0 - 2,5	5,0	14,5	100 / 500
4008040	80 x 40	1,0 - 3,0	5,0	14,5	100 / 350
4008050	80 x 50	2,0 - 4,0	5,0	14,5	100 / 500